


Nucraft Installation Guide


Always Lower The Boat Lift Before Attempting Assembly.

Tools Required: Phillips Screwdriver, Crescent Wrench, 3/4 Wrench, 9/16 Wrench, Drill and a 3/8" Drill bit.

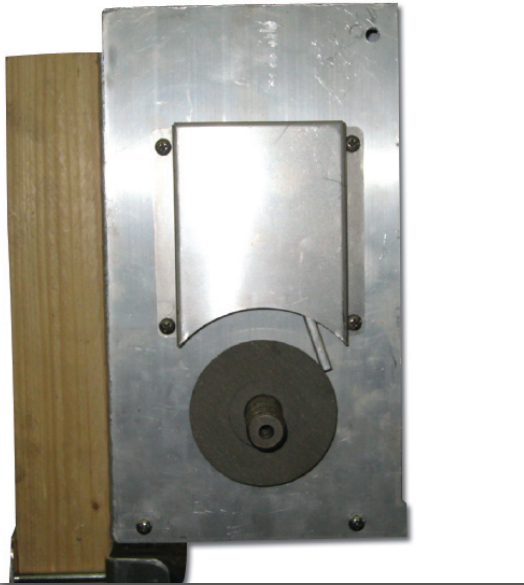


1. Lower the Boat Lift.
2. Remove the Wheel.
3. Remove the Brake Dog as Shown.


4. Install the Spline on the Winch Shaft.
5. Install the Collar Spacer.

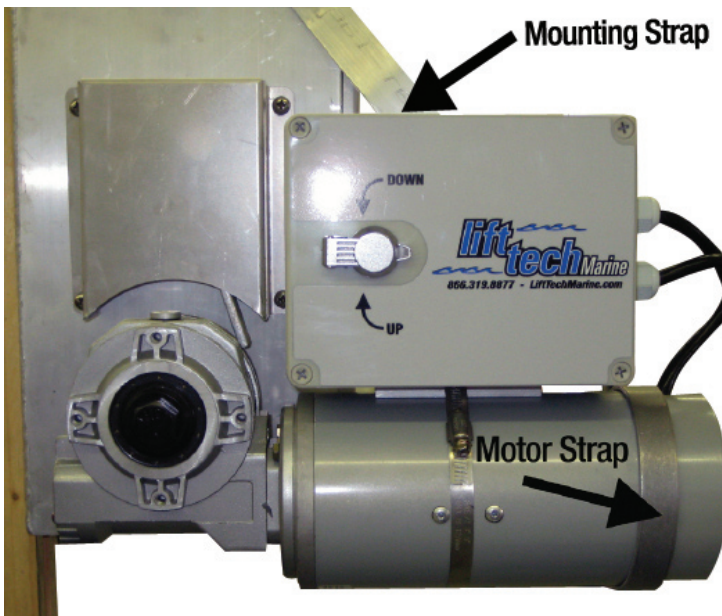



6. Slide the Motor onto the Spline.
7. Install the Motor Strap and Mounting Strap in a Horizontal Position as Shown.
8. You will need to Drill a 3/8" Hole for the Top Mounting Strap Bolt. See the Next Picture.

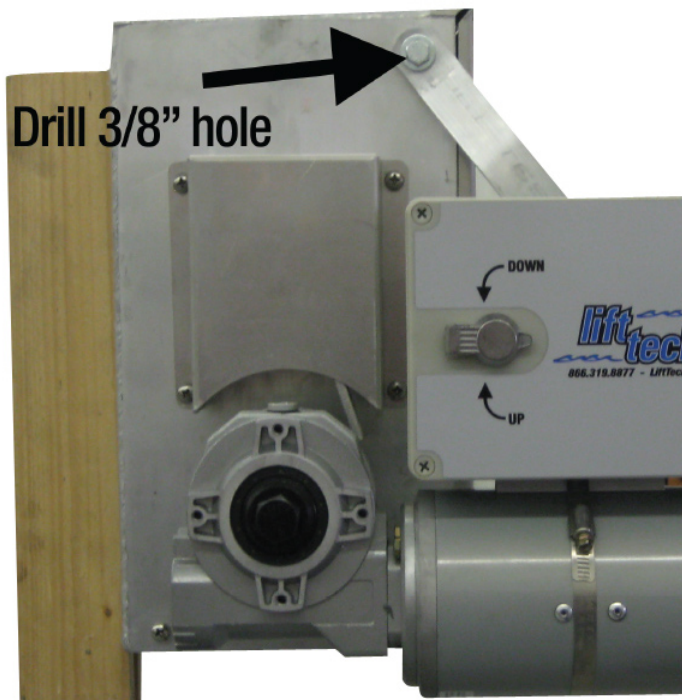

9. Drill a 3/8" Hole in the Winch Box. Mount Strap as Shown.

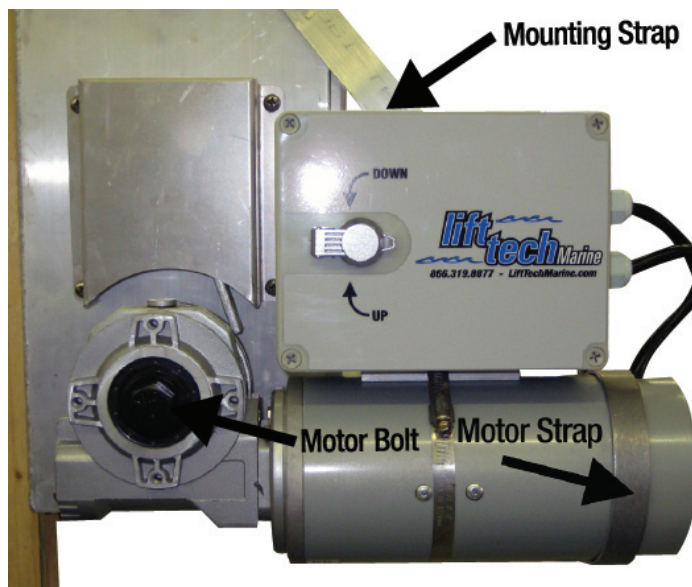

10. Install the Black Washer and Motor Bolt. Tighten to Approximately 70 Foot Pounds.
11. Tighten all the Bolts.

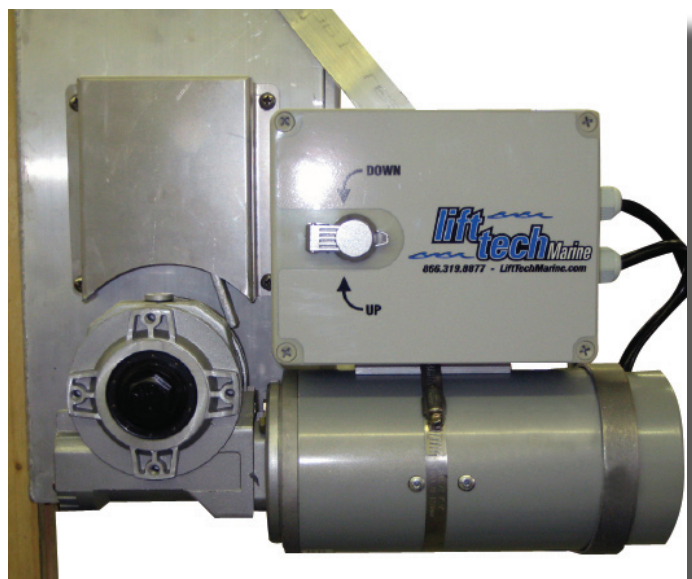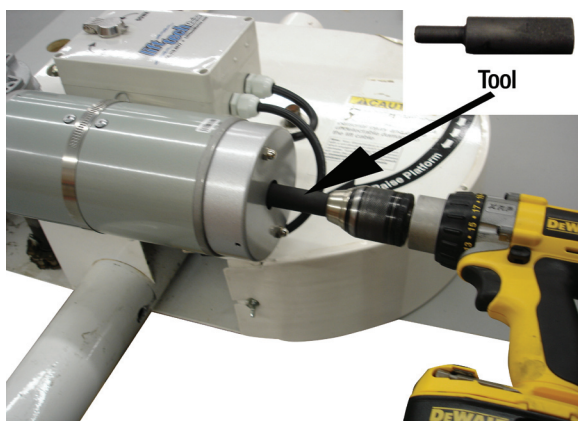

Plug in and Enjoy!

In case of a Power Outage, this Tool may be Inserted into a Drill to Raise or Lower your Lift.

Recommended Extension Cords up to 150 feet 12/3.

Any question regarding Electrical current requirements please call your Authorized Dealer or Lift Tech Marine 1-866-319-8877.

Caution: All power used on your dock or lift needs to be GFI protected at the shore line.

www.lifttechmarine.com