





Installing Floating Ladder on Wave Dock, Part #21961


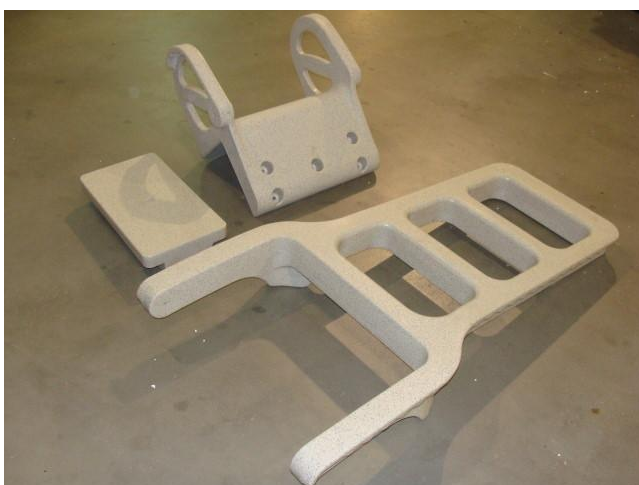


Plastic parts included.

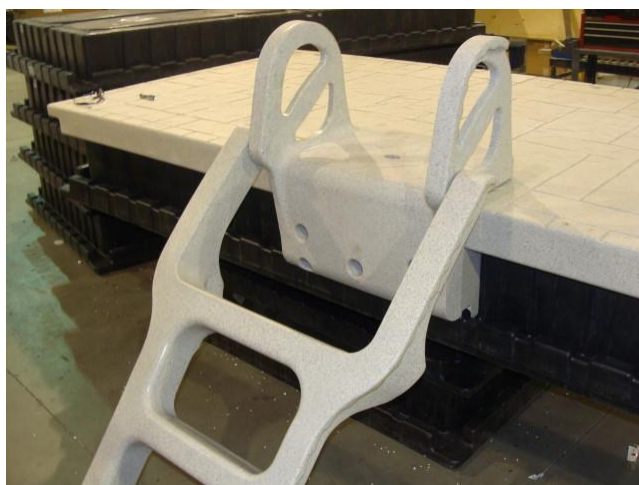


Ladder attached to the dock.

1. Slide the plastic channel insert into the channel on the dock. Be sure that the threaded insert on the edge is facing upward. Slide the plastic insert down the channel until the threaded insert lines up with a hole in the top deck. Spray on silicone to make it slide easier if necessary.

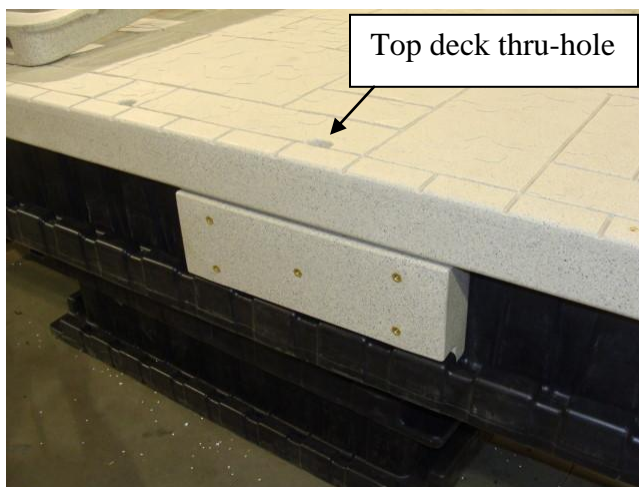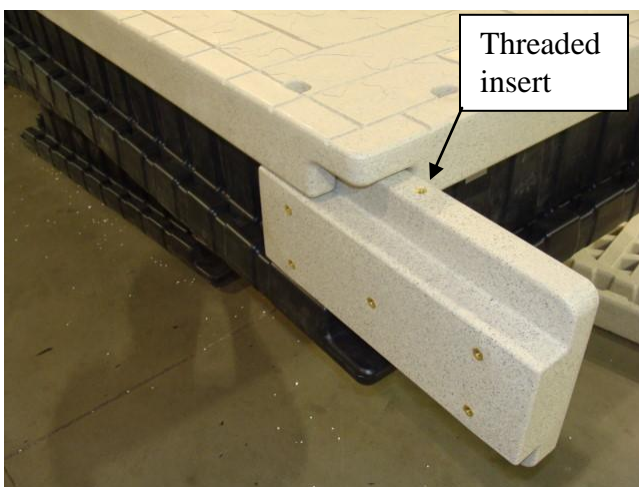

2. Attach the Ladder top to the channel insert by lining up the five holes in the ladder face and the one hole in the top, with the brass threaded inserts in the channel insert. Loosely thread the bolts in until all of them are lined up. Use the 3/8 x 2" bolts and washers on the face and the 3/8 x 3 3/4" bolt and washer on the top. Tighten securely.

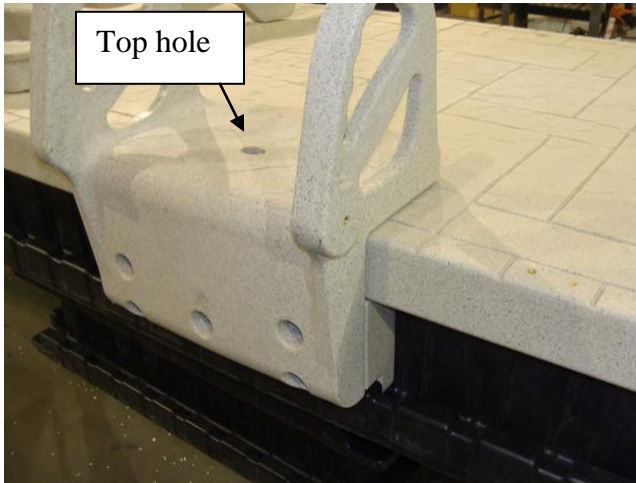

Ladder top lined up with the plastic insert



Bolts and washers attached at the ladder face.

3. Attach the ladder bottom to the ladder top by lining up the two top holes on the sides of the ladder bottom with the threaded inserts in the side of the ladder top. Use the two 3/8 x 1 1/4" bolts and washers to attach the ladder bottom to the ladder top and tighten securely. The ladder is now complete and can be pivoted all the way over onto the dock.

