


ADDITIONAL FEATURES:	LXT	LXT-L	LT WCI	LT WCI-T	LT WCII	ELITE WCI	ELITE WCII	ELITE WCIV-SBD	TRITON WC2-2	LXT LK2	LXT LK4	LXT LK6
2" COUPLER WITH SPRING LOADED SAFETY CHAINS	X	X	X	X	X	X	X	X (2 5/16")	X	X	X	X
FULLY WELDED ALUMINUM ALLOY FRAME FOR YEARS OF WORRY FREE USE & NO PAINT TO CHIP	X	X	X	X	X	X	X	X	X	X	X	X
KEEL GUARDS FOR ADDED HULL PROTECTION	X	X	X	X	X	X	X	X	X	X	X	X
BEARING LUBE GREASE SYSTEM FOR SUPERIOR LUBRICATION AND LONG BEARING LIFE	X	X	X	X	X	X	X	X	X	X	X	X
MOLDED WIRE HARNESS (NO SPLICES TO FAIL) AND SEALED LIGHTS FOR YEARS OF WORRY-FREE USE	X	X	X	X	X	X	X	X	X	X	X	X
ADJUSTABLE BOW AND WINCH POST WITH NON-MARRING ROLLERS TO PROPERLY FIT CRAFTS	X	X	X	X	X	X	X	X	X			
ADJUSTABLE CARPETED BUNKS AND BRACKETS TO FIT ALL HULL STYLES ON THE MARKET TODAY	X	X	X	X	X	X	X	X	X	CUSHIONED RACKS		
EXTRA WELDED ALUMINUM TABS FOR SECURING THE CRAFTS TO THE TRAILER			X	X	X	X	X	X	X	X	X	X



3 YEAR LIMITED WARRANTY


WHEN REGISTERED ONLINE (NON-REGISTERED TRAILERS HAVE A ONE YEAR WARRANTY). OTHER VENDOR WARRANTIES MAY APPLY. VISIT US ONLINE AT WWW.TRITONTRAILERS.COM FOR FULL WARRANTY DETAILS.

SPECIFICATIONS:

MODEL	# OF UNITS	TIRE/RIM CHOICE	GVWR	CARRYING CAPACITY	TRAILER WEIGHT	OVERALL WIDTH	OVERALL LENGTH	LOADED HITCH HEIGHT	AXLE TYPE	BRAKES
LXT	1	#03446 4.80 X 8C #06509 4.80 X 12C	1490	1355	135	55	145	14	SPRING	N/A
LT WCI	1	#03446 4.80 X 8C #06509 4.80 X 12C #04679 16.5 X 8C	1490	1295	195	59	171	17	SPRING	N/A
LTWCII-T	1	#06509 4.80 X 12C #03392 ST175/80D13C #09942 ST175/80D13C ALUM.	1865	1650	195	59	171	17	TORSION	N/A
ELITE WCI	1	#06509 4.80 X 12C #04153 5.30 X 12C #03165 20.5 X 10C #03392 ST175/80D13C	2000	1650	350	65	199	18	TORSION	N/A
LT WCII	2	#08875 ST145/R12E #10384 ST145/R12E ALUM.	2500	2210	290	96	174	16	SPRING	N/A
ELITE WCII	2	#07355 20.5X10E #03392 ST175/80D13C #08875 ST145/R12E	2700	2335	365	101.5	189	16	TORSION	N/A
SPECIAL ORDER TRAILERS - CALL YOUR DEALER FOR DETAILS										
LXT-L	1	#06509 4.80 X 12C	1490	1330	160	59	221	14	SPRING	N/A
TRITON WC2-2	2	#03392 ST175/80D13C #08875 ST145/R12E	2995	2495	500	102	201	16	TORSION	NO
ELITE WCIV-SBD	4	TRITON WC2-2 WITH SURGE DISC OR DRUM BRAKES #03392 ST175/80D13C #08875 ST145/R12E	4000 5400	3500 4200	500 1200	102	208 343.5	16 16	TORSION	YES 7" Surge Disc 1 Axle Std.
MODEL	NO. OF KAYAKS	TIRE/RIM CHOICE	GVWR	CARRYING CAPACITY	TRAILER WEIGHT	MAX. LOAD WEIGHT PER POSITION	OVERALL WIDTH	HITCH HEIGHT	OVERALL LENGTH	RACK SPACE
LXT-LK2	2	#06509 4.80x12C	1500	1295	205	120	76.25	17	189	35"
LXT-LK4	4	#06509 4.80x12C	1500	1275	225	120	76.25	17	189	35"
LXT-LK6	6	#06509 4.80x12C	1500	1265	235	120	76.25	17	189	26" & 35"

Safety Note:

A PWC trailer that is fit properly & secured well will always have the strap ran through the bow post one of two ways (as shown). This will draw the hull tight to the bow post the best way.

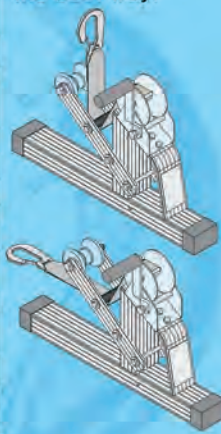

Overall lengths are based on the bunks setup in the farthest position to the rear of the trailer. Hitch height is based on standard tires, upgraded tires will change loaded hitch heights. Prices and specifications may change without notice. Please note: It is the responsibility of the purchaser to adhere to the brake laws regarding trailers. For full information on the laws in your state, contact the appropriate State Motor Vehicle Department. Brake options will change the overall length of trailer. Brake option is Surge Disc Brakes on the Elite WCIV and the Triton WC2-2 trailer. Recommended tongue weight 7-10% of GVWR.

AUTHORIZED DEALER:



Scan this code with your smart phone to go to the Triton website!

Triton U.S. Patent Numbers-
6,439,814 7,147,417 7,077,616 B2
5,823,559 6,247,719 B1 6,186,580 B1



857 WEST STATE STREET
HARTFORD, WI 53027
262-670-6514 FAX 262-670-6545



1/13

800-232-3780 WWW.TRITONTRAILERS.COM