

Hewitt Installation Guide

Always Lower The Boat Lift Before Attempting Assembly.


Tools required: Crescent Wrench, 9/16 Wrench, and Regular Screwdriver.



1. Lower the Boat Lift.
2. Remove the Wheel.



3. Remove the Plastic Cover.

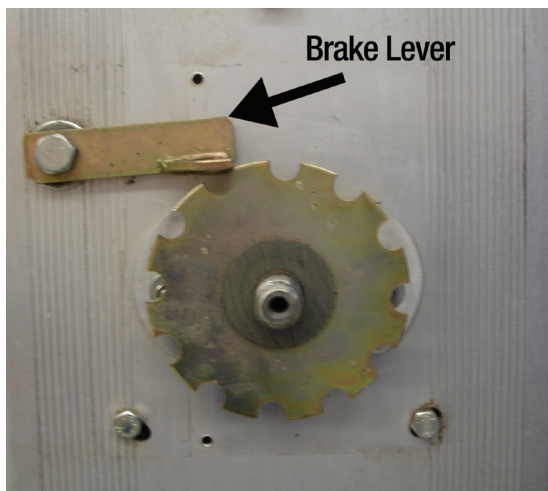


4. Remove the Brake Lever.



You Will Not use these pieces any longer.

5. Install the Plastic Cover and the Fiber Disc.




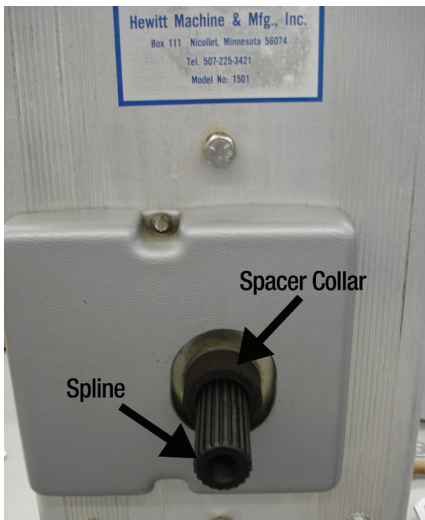


6. Install the Spline, and the Spacer Collar.




7. Remove the right Bolt and Washer from the Lift.

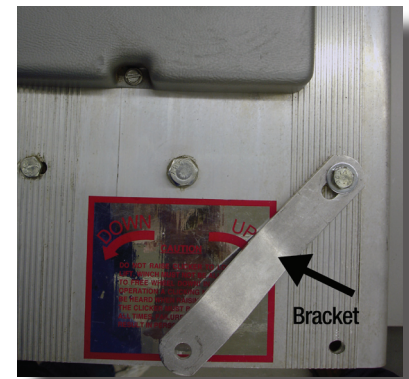

8. Install the Bracket on the Lift. Make sure to leave the bolts loose.

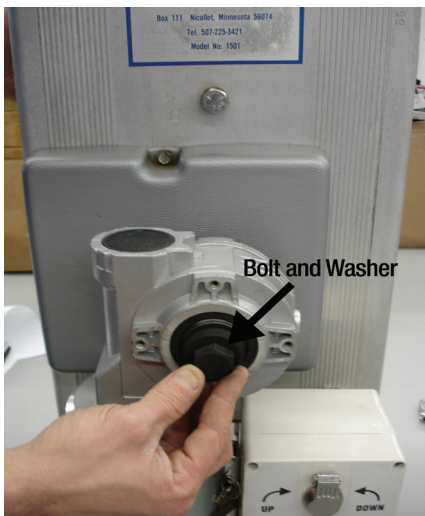

9. Slide the Motor down onto the Spline. Install the Bolt and Washer onto the Motor and Tighten to Approximately 70 Foot Pounds.

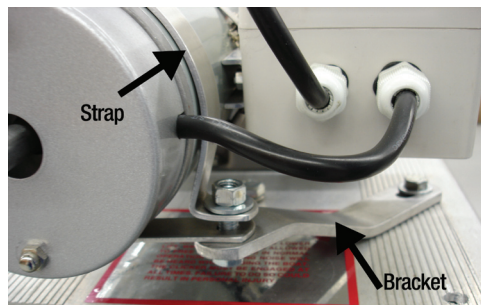

10. Install the Strap around the Motor. Attach the Strap to the Bracket and Tighten all bolts.



Plug in and Enjoy!

In case of a Power Outage, this Tool may be Inserted into a Drill to Raise or Lower your Lift.

Recommended Extension Cords up to 150 feet 12/3.

Any question regarding Electrical current requirements please call your Authorized Dealer or Lift Tech Marine 1-866-319-8877.

Caution: All power used on your dock or lift needs to be GFI protected at the shore line.

www.lifttechmarine.com