

To obtain a copy of your Owner's Manual & Safety Instructions contact Triton at www.tritontrailers.com.

NOTE: FAILURE TO FOLLOW MAINTENANCE INSTRUCTIONS WILL VOID WARRANTY!

TRITON Customer Instruction Sheet

DESCRIPTION:

2007 18E PONTOON

DRAWN BY:


TF

REVISION DATE:

3-30-07

DRAWING NO.:

07958

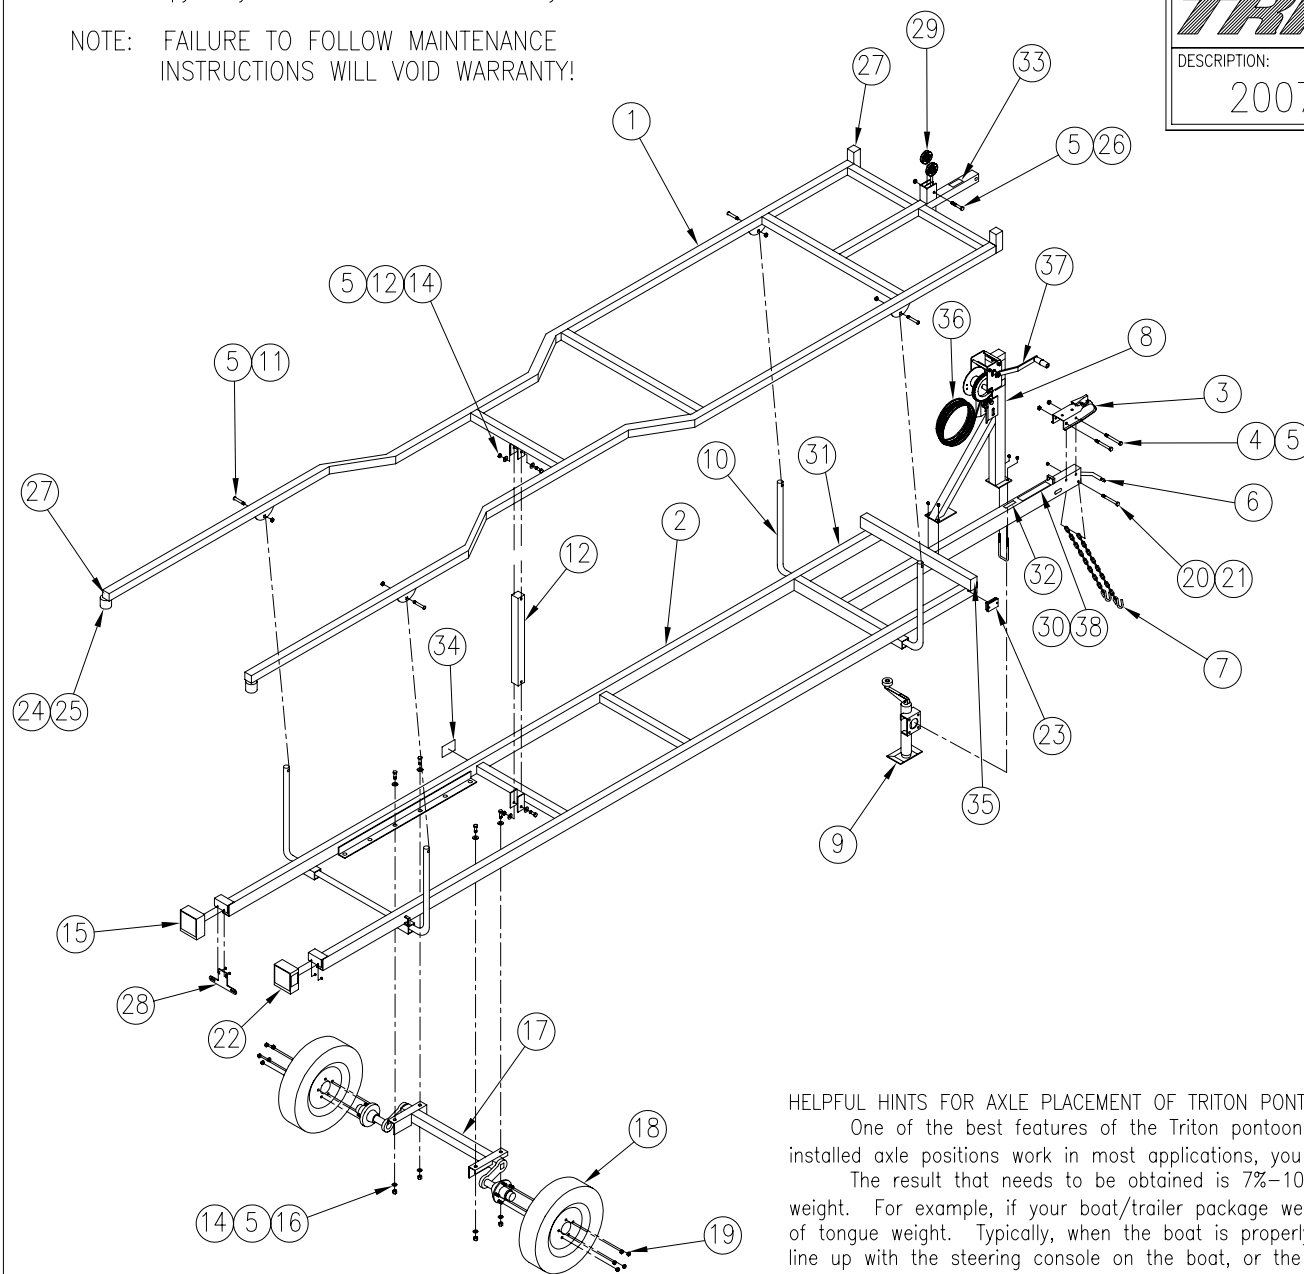

NOTE:
TORQUE LUG NUTS 85ft/lbs. FOLLOW
REQUIRED TIRE PRESSURE & MAXIMUM
LOAD LISTED ON TIRE.

#	PART NO.	DESCRIPTION	QTY
1	08965	TOP FRAME WELDMENT	1
2	08966	LOWER FRAME WELDMENT	1
3	02478	COUPLER	1
4	01097	1/2-13 x 4 HHCS	2
5	01098	1/2-13 HEX LOC NUT	13
6	07903	WIRE HARNESS	1
7	09663	SAFETY CHAIN, CLASS II	2
8	08905	WINCH ASSEMBLY	1
9	06690	JACK	1
10	06328	CRANK SHAFT ASSEMBLY	2
11	03605	1/2-13 x 3 CARRIAGE BOLT	4
12	03707	SWING ARM	1
13	01099	1/2-13 x 3 1/2 HHCS	2
14	02410	1/2 FLAT WASHER	12
15	07947	TAIL LIGHT, LH	1
16	00309	1/2-13 x 1 1/4 HHCS	4
17	06264	AXLE	1
18	04153	TIRE & WHEEL	2
19	02406	LUG NUT	10
20	00931	3/8-16 x 3 1/2 HHCS	1
21	01153	3/8-16 HEX LOC NUT	1
22	07935	TAIL LIGHT, RH	1
23	07934	CLEARANCE LIGHT	2
24	02616	ROLLER	2
25	06851	5/8 COLLAR	2
26	00308	1/2-13 x 2 3/4 HHCS	1
27	08287	PLASTIC PLUG, 2 x 2 ID	4
28	03530	LICENSE PLATE BRACKET, PLASTIC	1
29	05307	PULLEY	2
30	09410	SAFETY COMBO DECAL	1
31	09362	TRITON DECAL	2
32	02611	MOUNTING DECAL	1
33	06273	DECAL, WARNING/CAUTION	1
34	03836	OWNERS RESPONSIBILITY DECAL	1
35	04267	VINYL CAP 2 x 3 x 1 1/2 SILVER	2
36	02031	CABLE, 17'	1
37	01146	WINCH	1
38	09253	DECAL, TOW VEHICLE	1

HELPFUL HINTS FOR AXLE PLACEMENT OF TRITON PONTOON TRAILERS

One of the best features of the Triton pontoon trailers is the multiposition axle mounts. Though factory installed axle positions work in most applications, you may need to "fine tune" the axle placement.

The result that needs to be obtained is 7%-10% tongue weight. That is, 7-10% of the gross vehicle weight. For example, if your boat/trailer package weights 2000 lbs., you should have from 140 lbs. to 200 lbs. of tongue weight. Typically, when the boat is properly loaded, the center of the tire on a single axle trailer will line up with the steering console on the boat, or the center between the two tires on a tandem axle trailer. Axles can easily be moved by jacking the rear of the trailer removing the 1/2" bolts, and sliding the axle/tire assembly forward or backward to the desired set of slots. Make sure all hardware is tight.

REMINDER: Inadequate tongue weight will cause sway by the trailer. Excessive tongue weight can cause similar results and/or damage to suspension of tow vehicle. Proper hitch height also plays an important role.