





KBE-1250-46

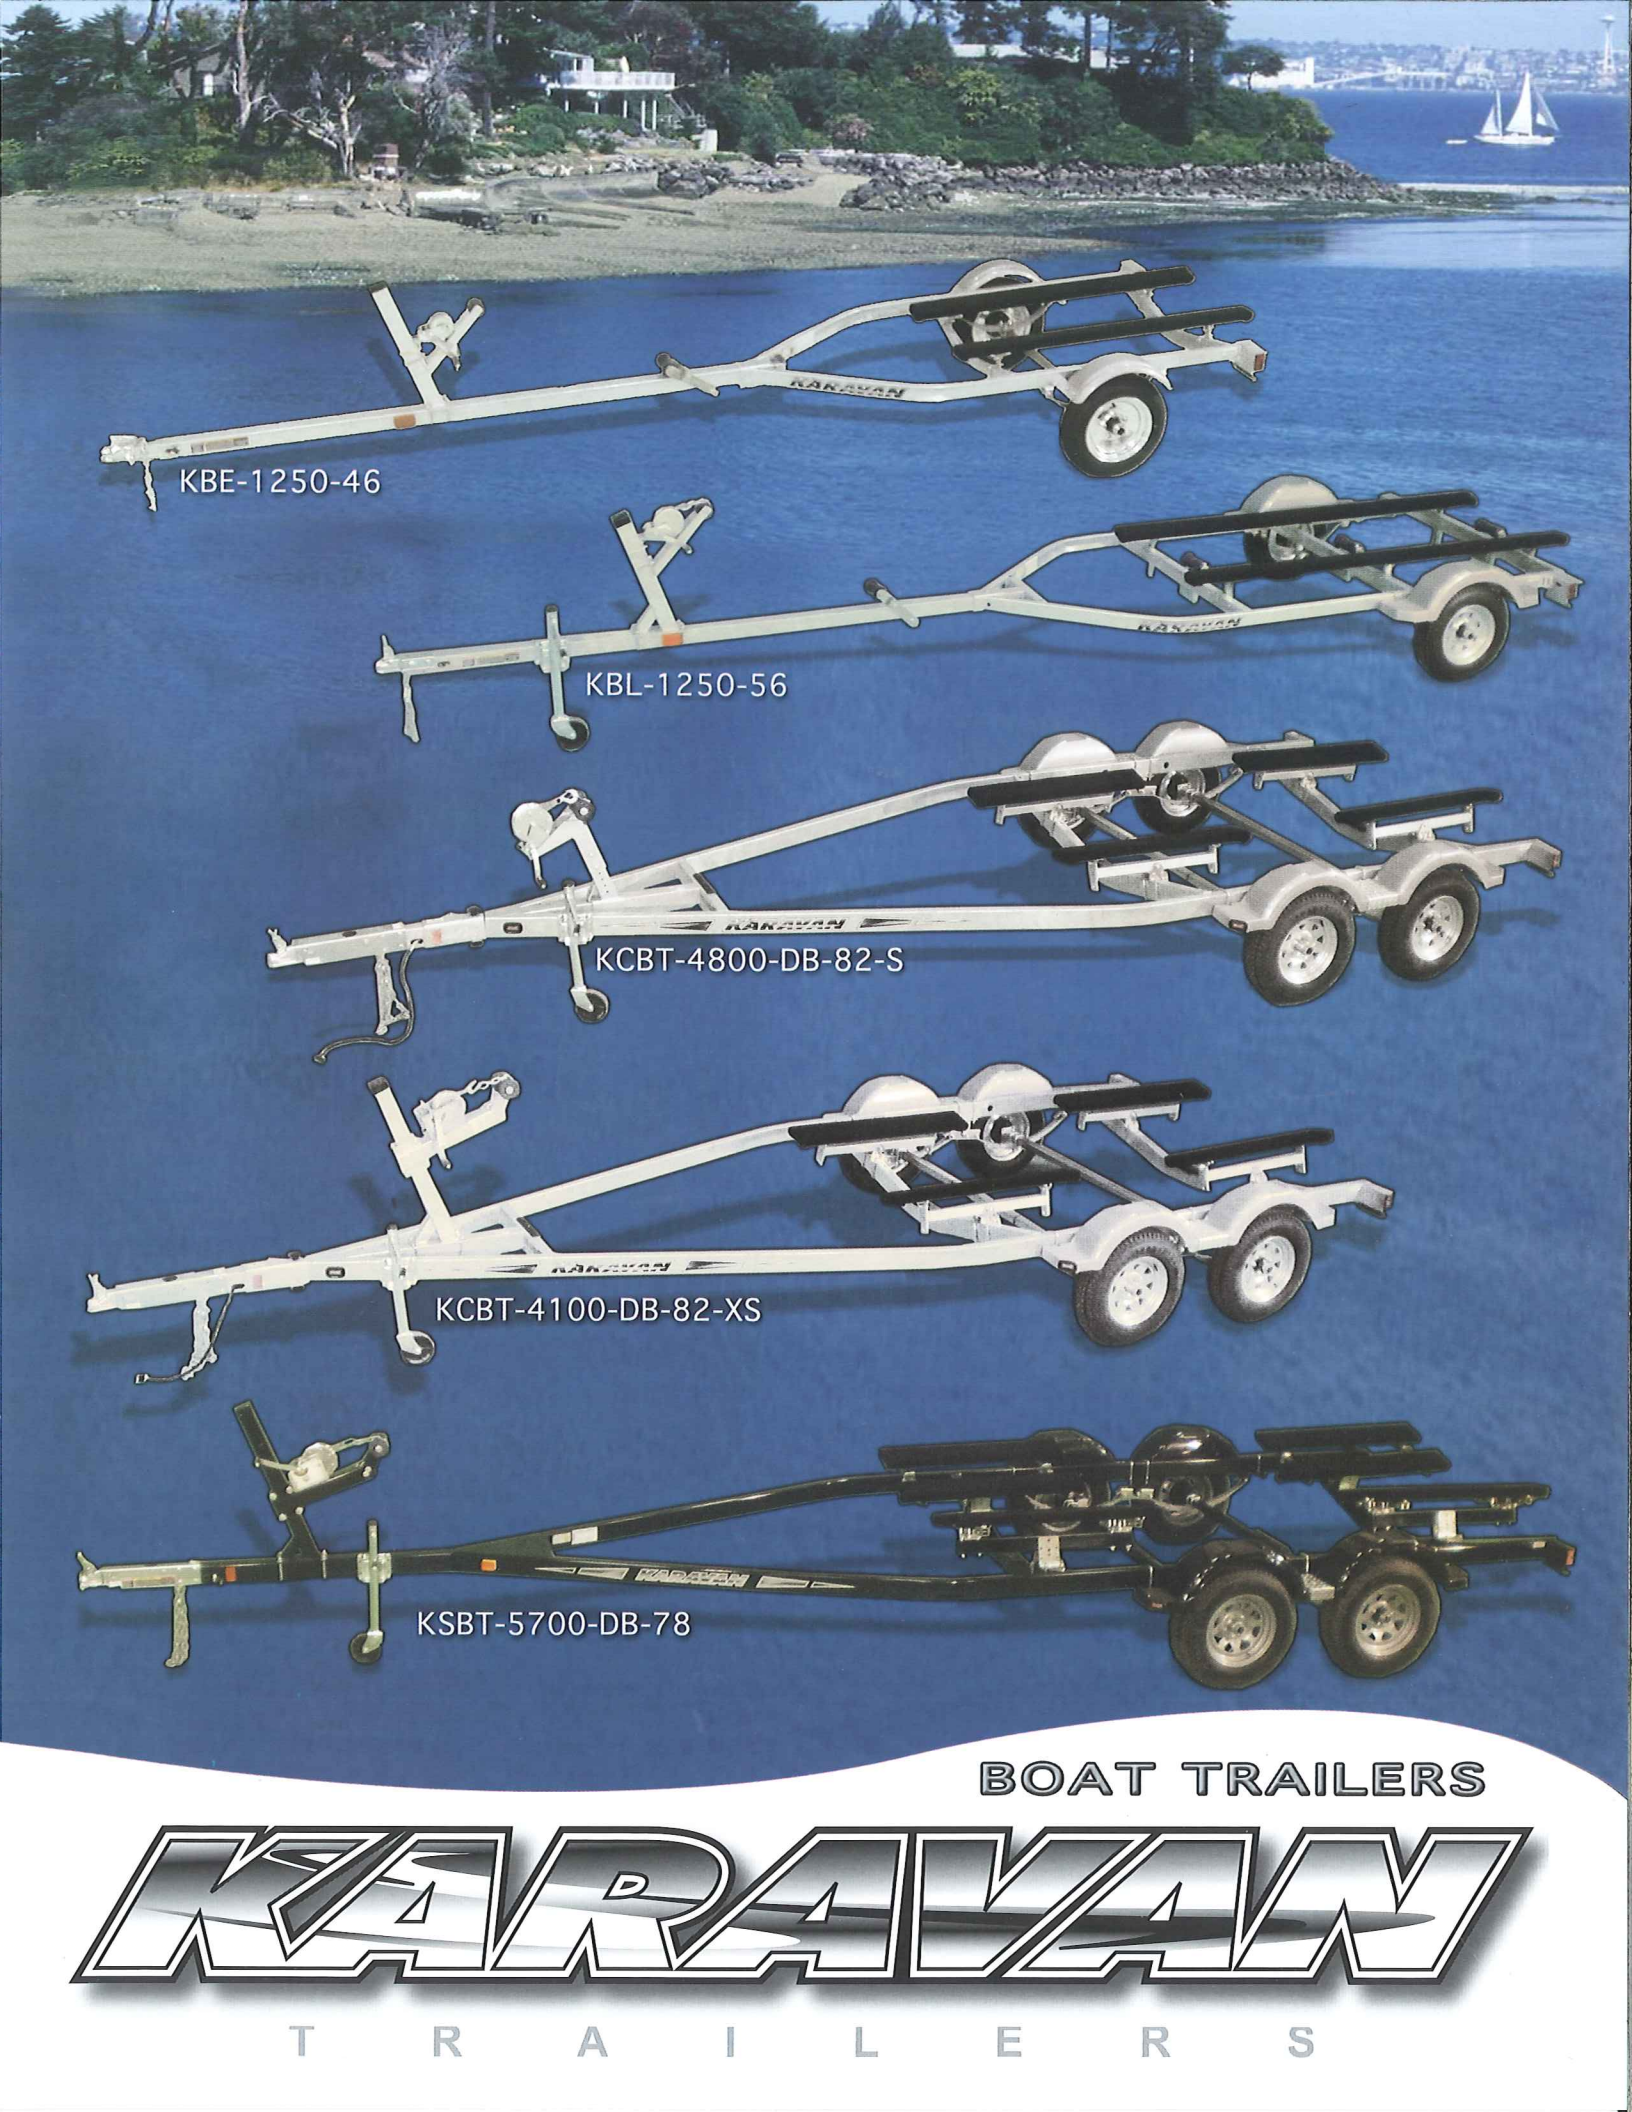

KBL-1250-56

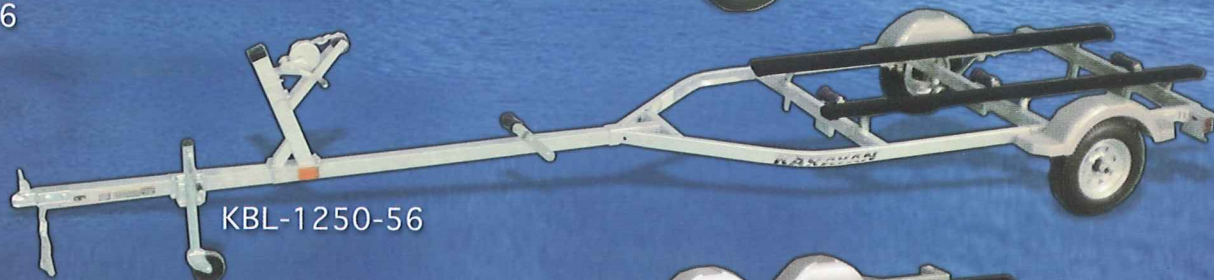

KCBT-4800-DB-82-S



KCBT-4100-DB-82-XS



KSBT-5700-DB-78

BOAT TRAILERS

KARAVAN

T R A I L E R S

KK-Bunk Trailers

Note: It is the responsibility of the purchasing party to follow their state or province's laws and regulations regarding brakes.
Note: Boat lengths listed on this sheet are for reference only. The transom to bow eye measurement MUST be taken into consideration, as well as width between fenders, when selecting a trailer for a specific boat.

MODEL	TIRE SIZE	CARRYING CAPACITY (LBS)	BOAT LENGTH	TRANSMOM TO BOW EYE (winch inside frame)	TRANSMOM TO BOW EYE (winch in front of frame)	WIDTH BETWEEN FENDERS	OVERALL WIDTH	OVERALL LENGTH	APPROX. WEIGHT (LBS)	BRAKES/SIZE DB-DISC	AXLES	TONGUE SIZE	SUSPENSION TYPE
KBE-900-46	4.80 X 8B	900	12'-16'	N/A	N/A	46"	61"	17'10"	230	N/A	1	3" X 3"	TORSION
KBE-1250-46	4.80 X 12B	1250	12'-16'	N/A	N/A	46"	61"	17'10"	250	N/A	1	3" X 3"	TORSION
KB-1250-56	4.80 X 12C	1250	15'-16'	N/A	N/A	56"	75"	17'8"	320	N/A	1	3" X 3"	SPRING
KBL-1250-56	5.30 X 12C	1250	16'-17'	N/A	N/A	56"	75"	21'	325	N/A	1	3" X 3"	SPRING
KBL-1500-56	5.30 X 12C	1500	16'-17'	N/A	N/A	56"	75"	21'	325	N/A	1	3" X 3"	SPRING
KDB-1500-71	ST175/80D13B	1390	15'-16'	N/A	98.37"-160"	66.5"	85"	15'11"	410	N/A	1	3" X 3"	TORSION
KKB-1600-64	5.30 X 12C	1600	16'-18'	139.92"	159.92"-197.28"	68"	84"	19'1"	360	N/A	1	3" X 3"	SPRING
KKB-1800-64	ST175/80D13B	1800	16'-18'	139.92"	159.92"-197.28"	68"	84"	19'1"	410	N/A	1	3" X 3"	SPRING
KKB-1800-70	ST175/80D13B	1800	16'-18'	139.44"	159.44"-196.80"	74"	90"	19'1"	420	N/A	1	3" X 3"	SPRING
KKB-1800-78	ST175/80D13B	1800	16'-18'	138.72"	158.72"-196.08"	84.5"	100"	19'1"	420	N/A	1	3" X 3"	SPRING
KKB-2100-64	ST175/80D13C	2100	16'-18'	139.92"	159.92"-197.28"	68"	84"	19'1"	410	N/A	1	3" X 3"	SPRING
KKB-2100-70	ST175/80D13C	2100	16'-18'	139.44"	159.44"-196.80"	74"	90"	19'1"	420	N/A	1	3" X 3"	SPRING
KKB-2100-78	ST175/80D13C	2100	16'-18'	138.72"	158.72"-196.08"	84.5"	100"	19'1"	430	N/A	1	3" X 3"	SPRING
KKB-2400-78	ST185/80D13C	2400	16'-18'	149.52"	169.52"-210.84"	84.5"	100"	19'1"	540	N/A	1	3" X 4"	SPRING
KKB-2800-DB-78-S	ST205/75D14C	2800	18'-19'	149.52"-159.52"	169.52"-210.84"	84.5"	100"	19'7"	660	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KKB-2800-DB-78-L	ST205/75D14C	2800	19'-21'	185.76"-195.76"	205.76"-247.08"	84.5"	100"	21'6"	680	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KKB-3100-DB-78-S	ST215/75D14C	3100	18'-19'	149.52"-159.52"	169.52"-210.84"	84.5"	100"	19'7"	760	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KKB-3100-DB-78-L	ST215/75D14C	3100	19'-21'	185.76"-195.76"	205.76"-247.08"	84.5"	100"	21'6"	780	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KKBT-3500-DB-78-XS	ST175/80D13B	3500	18'-19'	149.88"-159.88"	169.88"-231.60"	84.5"	100"	19'7"	930	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-3500-DB-78-S	ST175/80D13B	3500	19'-21'	186.12"-196.12"	206.12"-257.88"	84.5"	100"	24'8"	930	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-3500-DB-78-L	ST175/80D13B	3500	21'-23'	196.08"-206.08"	216.08"-267.84"	84.5"	100"	24'8"	930	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-4100-DB-78-XS	ST175/80D13C	4100	18'-19'	149.88"-159.88"	169.88"-231.60"	84.5"	100"	19'7"	930	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-4100-DB-78-S	ST175/80D13C	4100	19'-21'	186.12"-196.12"	206.12"-257.88"	84.5"	100"	24'8"	930	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-4100-DB-78-L	ST175/80D13C	4100	21'-23'	196.08"-206.08"	216.08"-267.84"	84.5"	100"	24'8"	930	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-4800-DB-78-XS	ST205/75D14C	4800	18'-19'	149.88"-159.88"	169.88"-231.60"	84.5"	100"	19'7"	960	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-4800-DB-78-S	ST205/75D14C	4800	19'-21'	186.12"-196.12"	206.12"-257.88"	84.5"	100"	24'8"	980	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-4800-DB-78-L	ST205/75D14C	4800	21'-23'	196.08"-206.08"	216.08"-267.84"	84.5"	100"	24'8"	980	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KKBT-5400-DB-78-S	ST215/75D14C	5400	20'-23'	186.36"-196.36"	206.36"-277.92"	84.5"	100"	25'	1100	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KBT-5400-DB-79	ST205/75D14C	5400	23'-25'	N/A	253.50"-294.00"	79"	97"	29'	1690	DB/10"- ONE AXLE	2	3" X 5"	SPRING
KBT-6200-DB-79	ST225/75D15C	6200	23'-25'	N/A	253.50"-294.00"	79"	97"	29'	1950	DB/12"- ONE AXLE	2	3" X 5"	SPRING
KBT-7400-TDB-79	ST225/75D15D	7400	23'-25'	N/A	253.50"-294.00"	79"	97"	29'	2000	DB/12"- TWO AXLE	2	3" X 5"	SPRING
KBT-8400-TDB-79-L	7.50 X 16.5E	8400	26'-29'	N/A	291.00"-332.40"	79"	97"	33'	2580	DB/12"- TWO AXLE	2	3" X 5"	SPRING
KBT-12000-TDB-79	ST225/75D15D	12000	26'-29'	N/A	291.00"-332.40"	79"	97"	33'	2660	DB/12"- TWO AXLE	3	3" X 5"	SPRING

KK-Roller Trailers

Note: It is the responsibility of the purchasing party to follow their state or province's laws and regulations regarding brakes.
Note: Boat lengths listed on this sheet are for reference only. The transom to bow eye measurement MUST be taken into consideration, as well as width between fenders, when selecting a trailer for a specific boat.

MODEL	TIRE SIZE	CARRYING CAPACITY (LBS)	BOAT LENGTH	TRANSMOM TO BOW EYE (winch inside frame)	TRANSMOM TO BOW EYE (winch in front of frame)	WIDTH BETWEEN FENDERS	OVERALL WIDTH	OVERALL LENGTH	APPROX. WEIGHT (LBS)	BRAKES/SIZE DB-DISC	AXLES	TONGUE SIZE	SUSPENSION TYPE	NO. OF ROLLERS
CATE-900-46	4.80 X 8B	850	12'-16'	N/A	N/A	N/A	101"	17'10"	230	N/A	1	3" x 3"	SPRING	4
CAT-1250-56	4.80 X 12B	1250	12'-16'	N/A	N/A	N/A	101"	17'8"	350	N/A	1	3" x 3"	SPRING	4
KRE-1250-46	4.80 X 12B	1250	12'-16'	N/A	N/A	N/A	61"	17'10"	260	N/A	1	3" x 3"	TORSION	12
KR-1250-56	5.30 X 12C	1250	15'-17'	N/A	N/A	56"	75"	17'10"	320	N/A	1	3" x 3"	SPRING	10
KR-1500-56	5.30 X 12C	1500	15'-17'	N/A	N/A	56"	75"	21'	325	N/A	1	3" x 3"	SPRING	10
KKR-1600-64	5.30 X 12C	1600	16'-18'	139.92"	159.92"-197.28"	68"	84"	19'1"	360	N/A	1	3" x 3"	SPRING	16
KKR-1800-64	ST175/80D13B	1800	16'-18'	139.92"	159.92"-197.28"	68"	84"	19'1"	410	N/A	1	3" x 3"	SPRING	16
KKR-1800-70	ST175/80D13B	1800	16'-18'	139.44"	159.44"-196.80"	74"	90"	19'1"	420	N/A	1	3" x 3"	SPRING	16
KKR-1800-78	ST175/80D13B	1800	16'-18'	138.72"	158.72"-196.08"	74"	90"	19'1"	420	N/A	1	3" x 3"	SPRING	16
KKR-2100-64	ST175/80D13C	2100	16'-18'	139.92"	159.92"-197.28"	68"	84"	19'1"	410	N/A	1	3" x 3"	SPRING	20
KKR-2100-70	ST175/80D13C	2100	16'-18'	139.44"	159.44"-196.80"	74"	90"	19'1"	420	N/A	1	3" x 3"	SPRING	20
KKR-2100-78	ST175/80D13C	2100	16'-18'	138.72"	158.72"-196.08"	84.5"	100"	19'1"	430	N/A	1	3" x 3"	SPRING	20
KKR-2400-78	ST185/80D13C	2400	16'-18'	149.52"	169.52"-210.84"	84.5"	100"	19'7"	540	N/A	1	3" x 4"	SPRING	20
KKR-2800-DB-78-S	ST205/75D14C	2800	18'-19'	149.52"-159.52"	169.52"-210.84"	84.5"	100"	19'7"	660	DB/10"- ONE AXLE	1	3" x 4"	SPRING	24
KKR-2800-DB-78-L	ST205/75D14C	2800	19'-21'	185.76"-195.76"	205.76"-247.08"	84.5"	100"	21'6"	680	DB/10"- ONE AXLE	1	3" x 4"	SPRING	24
KKR-3100-DB-78-S	ST215/75D14C	3100	18'-19'	141.72"-151.72"	161.72"-203.04"	84.5"	100"	19'7"	760	DB/10"- ONE AXLE	1	3" x 4"	SPRING	24
KKR-3100-DB-78-L	ST215/75D14C	3100	19'-21'	177.96"-187.96"	197.96"-239.28"	84.5"	100"	21'6"	780	DB/10"- ONE AXLE	1	3" x 4"	SPRING	24
KKRT-3500-DB-78-XS	ST175/80D13B	3500	18'-19'	145.20"-155.20"	165.20"-224.88"	84.5"	100"	19'7"	930	DB/10"- ONE AXLE	2	3" x 4"	SPRING	24
KKRT-3500-DB-78-S	ST175/80D13B	3500	19'-21'	181.44"-191.44"	201.44"-251.16"	84.5"	100"	24'8"	930	DB/10"- ONE AXLE	2	3" x 4"	SPRING	24
KKRT-3500-DB-78-L	ST175/80D13B	3500	21'-23'	191.40"-201.40"	211.40"-261.12"	84.5"	100"	24'8"	930	DB/10"- ONE AXLE	2	3" x 4"	SPRING	24
KKRT-4100-DB-78-XS	ST175/80D13C	4100	18'-19'	145.20"-155.20"	165.20"-224.88"	84.5"	100"	19'7"	930	DB/10"- ONE AXLE	2	3" x 4"	SPRING	24
KKRT-4100-DB-78-S	ST175/80D13C	4100	19'-21'	181.44"-191.44"	201.44"-251.16"	84.5"	100"	24'8"	930	DB/10"- ONE AXLE	2	3" x 4"	SPRING	24
KKRT-4100-DB-78-L	ST175/80D13C	4100	21'-23'	191.40"-201.40"	211.40"-261.12"	84.5"	100"	24'8"	930	DB/10"- ONE AXLE	2	3" x 4"	SPRING	24
KKRT-4800-DB-78-XS	ST205/75D14C	4800	18'-19'	145.20"-155.20"	165.20"-224.88"	84.5"	100"	19'7"	960	DB/10"- ONE AXLE	2	3" x 4"	SPRING	32
KKRT-4800-DB-78-S	ST205/75D14C	4800	19'-21'	181.44"-191.44"	201.44"-251.16"	84.5"	100"	24'8"	980	DB/10"- ONE AXLE	2	3" x 4"	SPRING	32
KKRT-4800-DB-78-L	ST205/75D14C	4800	21'-23'	191.40"-201.40"	211.40"-261.12"	84.5"	100"	24'8"	980	DB/10"- ONE AXLE	2	3" x 4"	SPRING	32
KKRT-5400-DB-78	ST215/75D14C	5400	20'-23'	178.32"-188.32"	198.32"-272.88"	84.5"	100"	25'2"	1100	DB/10"- ONE AXLE	2	3" x 5"	SPRING	32
KRT-5400-DB-79	ST205/75D14C	5400	23'-25'	N/A	253.50"-294.00"	79"	97"	29'	1690	DB/10"- ONE AXLE	2	3" x 5"	SPRING	60
KRT-6200-DB-79	ST225/75D15C	6200	23'-25'	N/A	253.50"-294.00"	79"	97"	29'	1950	DB/12"-ONE AXLE	2	3" x 5"	SPRING	60
KRT-7400-TDB-79	ST225/75D15D	7400	23'-25'	N/A	253.50"-294.00"	79"	97"	29'	2000	DB/12"- TWO AXLE	2	3" x 5"	SPRING	64
KRT-8400-TDB-79-L	7.50 X 16.5E	8400	26'-29'	N/A	291.00"-332.40"	79"	97"	33'	2580	DB/12"- TWO AXLE	2	3" x 5"	SPRING	96
KRT-11000-TDB-79	ST225/75D15D	11000	26'-29'	N/A	291.00"-332.40"	79"	97"	33'	2660	DB/12"- TWO AXLE	3	3" x 5"	SPRING	96

SPECIFICATIONS

Standard swing tongue on all boat trailers 1600 lbs to 4800 lbs.
Swing tongues not available on I-Beam trailers



KC-Bunk Trailers

Note: It is the responsibility of the purchasing party to follow their state or province's laws and regulations regarding brakes.
Note: Boat lengths listed on this sheet are for reference only. The transom to bow eye measurement MUST be taken into consideration, as well as width between fenders, when selecting a trailer for a specific boat.

MODEL	TIRE SIZE	CARRYING CAPACITY (LBS)	BOAT LENGTH	TRANSOM TO BOW EYE	WIDTH BETWEEN FENDERS	OVERALL WIDTH	OVERALL LENGTH	APPROX. WEIGHT (LBS)	BRAKES/SIZE DB-DISC	AXLES	TONGUE SIZE	SUSPENSION TYPE
KCB-1600-60	5.30 X 12C	1600	14'-17'	144.60"-188.04"	62"	78"	18'	430	OPTIONAL	1	3" X 3"	SPRING
KCB-1800-70	ST175/80D13B	1800	16'-19'	166.08"-202.68"	72"	88"	20'	507	OPTIONAL	1	3" X 3"	SPRING
KCB-2200-70	ST175/80D13C	2200	16'-19'	166.08"-202.68"	72"	88"	20'	507	OPTIONAL	1	3" X 3"	SPRING
KCB-2200-74	ST175/80D13C	2200	15'-17'	169.68"-197.76"	76"	92"	20'	500	OPTIONAL	1	3" X 3"	SPRING
KCB-2400-82	ST185/80D13C	2400	15'-18'	159.10"-192.80"	82"	100"	20'	623	OPTIONAL	1	3" X 4"	SPRING
KCB-2800-DB-82-S	ST205/75D14C	2800	15'-18'	156.20"-192.90"	82"	101"	21'	688	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KCB-2800-DB-82-L	ST205/75D14C	2800	17'-20'	180.5"-216.90"	82"	101"	23'	709	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KCB-3100-DB-82-S	ST215/75D14C	3100	15'-18'	156.20"-192.90"	82"	101"	21'	688	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KCB-3100-DB-82-L	ST215/75D14C	3100	17'-20'	180.20"-216.90"	82"	101"	23'	709	DB/10"-ONE AXLE	1	3" X 4"	SPRING
KCBT-3500-DB-82-S	ST175/80D13B	3500	16'-18.5'	166.80"-198.20"	84"	100"	22'	898	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KCBT-3500-DB-82-L	ST175/80D13B	3500	18'-20.5'	190.80"-222.20"	84"	100"	24'	919	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KCBT-4100-DB-82-S	ST175/80D13C	4100	16'-18.5'	166.80"-198.20"	84"	100"	22'	898	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KCBT-4100-DB-82-L	ST175/80D13C	4100	18'-20.5'	190.80"-222.20"	84"	100"	24'	919	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KCBT-4800-DB-82-S	ST185/80D13C	4800	16'-18.5'	166.80"-198.20"	84"	100"	22'	898	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KCBT-4800-DB-82-L	ST185/80D13C	4800	18'-20.5'	190.80"-222.20"	84"	100"	24'	919	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KSBT-5400-DB-78	ST205/75D14C	5400	20'-22'	205.32"-248.64"	80"	100"	24'	1070	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KSBT-5700-DB-78	ST205/75D14C	5700	20'-23'	223.00"-262.00"	80"	100"	26'	1180	DB/10"-ONE AXLE	2	3" X 4"	SPRING
KSBT-6700-TDB-78	ST225/75D15C	6700	20'-23'	223.00"-262.00"	80"	100"	26'	1465	DB/12"-TWO AXLE	2	3" X 4"	SPRING

KC-Roller Trailers

Note: It is the responsibility of the purchasing party to follow their state or province's laws and regulations regarding brakes.
Note: Boat lengths listed on this sheet are for reference only. The transom to bow eye measurement MUST be taken into consideration, as well as width between fenders, when selecting a trailer for a specific boat.

MODEL	TIRE SIZE	CARRYING CAPACITY (LBS)	BOAT LENGTH	TRANSOM TO BOW EYE	WIDTH BETWEEN FENDERS	OVERALL WIDTH	OVERALL LENGTH	APPROX. WEIGHT (LBS)	BRAKES/SIZE DB-DISC	AXLES	TONGUE SIZE	SUSPENSION TYPE	NO. OF ROLLERS
KCR-1600-60	5.30 X 12C	1600	14'-17'	148.32"-188.76"	62"	78"	18'	430	OPTIONAL	1	3" X 3"	SPRING	16
KCR-1800-70	ST175/80D13B	1800	16'-19'	159.84"-206.40"	72"	88"	20'	507	OPTIONAL	1	3" X 3"	SPRING	16
KCR-2200-70	ST175/80D13C	2200	16'-19'	158.52"-206.40"	72"	88"	20'	507	OPTIONAL	1	3" X 3"	SPRING	16
KCR-2200-74	ST175/80D13C	2200	15'-17'	164.04"-204.72"	76"	92"	20'	500	OPTIONAL	1	3" X 3"	SPRING	16
KCR-2400-82	ST185/80D13C	2400	15'-18'	165.10"-193.40"	82"	100"	20'	623	OPTIONAL	1	3" X 4"	SPRING	20
KCR-2800-DB-82-S	ST205/75D14C	2800	15'-18'	162.10"-193.40"	82"	101"	21'	688	DB/10"-ONE AXLE	1	3" X 4"	SPRING	20
KCR-2800-DB-82-L	ST205/75D14C	2800	17.5'-20'	186.10"-217.40"	82"	101"	23'	709	DB/10"-ONE AXLE	1	3" X 4"	SPRING	20
KCR-3100-DB-82-S	ST215/75D14C	3100	15.5'-18'	162.10"-193.40"	82"	101"	21'	688	DB/10"-ONE AXLE	1	3" X 4"	SPRING	20
KCR-3100-DB-82-L	ST215/75D14C	3100	17.5'-20'	186.10"-217.40"	82"	101"	23'	709	DB/10"-ONE AXLE	1	3" X 4"	SPRING	20
KCRT-3500-DB-82-S	ST175/80D13B	3500	16'-18.5'	165.60"-197.70"	84"	100"	22'	898	DB/10"-ONE AXLE	2	3" X 4"	SPRING	28
KCRT-3500-DB-82-L	ST175/80D13B	3500	18'-20.5'	189.60"-221.70"	84"	100"	24'	919	DB/10"-ONE AXLE	2	3" X 4"	SPRING	28
KCRT-4100-DB-82-S	ST175/80D13C	4100	16'-18.5'	165.60"-197.70"	84"	100"	22'	898	DB/10"-ONE AXLE	2	3" X 4"	SPRING	28
KCRT-4100-DB-82-L	ST175/80D13C	4100	18'-20.5'	189.60"-221.70"	84"	100"	24'	919	DB/10"-ONE AXLE	2	3" X 4"	SPRING	2
KCRT-4800-DB-82-S	ST185/80D13C	4800	16'-18.5'	165.60"-197.70"	84"	100"	22'	898	DB/10"-ONE AXLE	2	3" X 4"	SPRING	32
KCRT-4800-DB-82-L	ST185/80D13C	4800	18'-20.5'	189.60"-221.70"	84"	100"	24'	919	DB/10"-ONE AXLE	2	3" X 4"	SPRING	32
KSRT-5400-DB-78	ST205/75D14C	5400	19'-22'	200.28"-246.60"	80"	100"	24'	1070	DB/10"-ONE AXLE	2	3" X 4"	SPRING	32
KSRT-5700-DB-78	ST205/75D14C	5700	20'-22'	227.00"-243.00"	80"	100"	26'	1180	DB/10"-ONE AXLE	2	3" X 4"	SPRING	64
KSRT-6700-TDB-78	ST225/75D15C	6700	20'-22'	227.00"-243.00"	80"	100"	26'	1465	DB/12"-TWO AXLE	2	3" X 4"	SPRING	64

I-Beam Trailers

Note: It is the responsibility of the purchasing party to follow their state or province's laws and regulations regarding brakes.
Note: Boat lengths listed on this sheet are for reference only. The transom to bow eye measurement MUST be taken into consideration, as well as width between fenders, when selecting a trailer for a specific boat.


MODEL	TIRE SIZE	CARRYING CAPACITY (LBS)	BOAT LENGTH	TRANSOM TO BOW EYE	WIDTH BETWEEN FENDERS	OVERALL WIDTH	OVERALL LENGTH	APPROX. WEIGHT (LBS)	BRAKES/SIZE DB-DISC	AXLES	TONGUE SIZE	SUSPENSION TYPE
SL-1500-52	5.30 X 12C	1500	10'-15'	116.4"-150"	52"	70.3"	15.5'	310	N/A	1	3" X 3"	SPRING
SL-1500-52	18.5 X 8C	1500	10'-15'	116.4"-150"	52"	70.3"	15.5'	310	N/A	1	3" X 3"	SPRING
SL-1500-52	ST175/80D13B	1500	10'-15'	116.4"-150"	52"	70.3"	15.5'	310	N/A	1	3" X 3"	SPRING
SL-1700-70-LFB	ST175/80D13B	1700	15'-17'	162"-201.6"	77"	93"	18'	498	N/A	1	3" X 4"	TORSION
SL-2450-74-LFB	ST185/80D13C	2450	16'-18'	162"-205.2"	81"	97"	19'	516	N/A	1	3" X 4"	TORSION
SL-2450-HD-19-LFB	ST215/75D14C	2450	18'-20'	180"-217.2"	82"	97"	21'	536	N/A	1	3" X 4"	TORSION
SL-2450-HD-21-LFB	ST215/75D14C	2450	19'-22'	198"-243.6"	82"	97"	22.5'	548	N/A	1	3" X 4"	TORSION
SL-3100-DB-74-LFB	ST215/75D14C	3100	18'-20'	180"-217.2"	81"	97"	21'	678	DB/10"-ONE AXLE	1	3" X 4"	TORSION
SL-4100-DB-78-LFB	ST225/75D15D	4100	18'-20'	177.6"-222"	82"	99"	22.5'	843	DB/10"- ONE AXLE	1	3" X 4"	TORSION
SLT-5000-TDB-78-LFB	ST185/80D13C	5000	19'-23'	198"-255.6"	82"	99"	24'	980	DB/10"- TWO AXLES	2	3" X 4"	TORSION
SLT-5800-TDB-78-LFB	ST205/75D14C	5800	19'-23'	198"-255.6"	82"	99"	24'	1020	DB/10"- TWO AXLES	2	3" X 4"	TORSION
SLT-5800-TDB-78-LFB-L	ST225-75D15C	5800	21'-26'	214.8"-276"	82"	101"	26.6'	1371	DB/12"- TWO AXLES	2	3" X 5"	TORSION
SLT-6800-TDB-78-LFB	ST225/75D15C	6800	21'-26'	214.8"-276"	82"	101"	26.6'	1371	DB/12"- TWO AXLES	2	3" X 5"	TORSION
SLT-8000-TDB-78-LFB	ST225/75D15D	8000	24'-28'	258"-312"	82"	101"	31.3'	1717	DB/12"- TWO AXLES	2	3" X 5"	TORSION



NOTE: It is the responsibility of the purchasing party to follow their state or province's laws and regulations regarding brakes. Karavan Trailers are manufactured and protected under one or more of the following patents. US Patent No. 5, 816, 616, 433, 352

STANDARD FEATURES

- Waterproof Lighting
- Adjustable Running Gear
- Polyester Powder Finish
- Hot Dipped Galvanized Finish



BENEFITS OF THE SURE-LUBE SYSTEM STANDARD ON ALL AXES

- Provides positive lubrication by eliminating air pockets in the hub cavity
- Clean, easy maintenance, no disassembly required
- Allows you to change grease in the hubs in just minutes by pumping the old grease out with new grease

Karavan Trailers Incorporated Warranty Policy

Karavan Trailers, Inc. warrants each new Karavan Trailers Trailer to be free from defects in materials and workmanship for a period of one (1) year from date of purchase or two (2) years from the date of manufacturer. Karavan Trailers shall repair or replace, without charge, any parts found to be defective because of imperfect workmanship or materials, within a reasonable time after the trailer is returned at purchaser's expense to any Karavan Trailers authorized distributor or dealer. Karavan Trailers will have a limited lifetime warranty against manufacturer defects on the frame. See karavantrailers.com for full description of our warranty policy.

KARAVAN

T R A I L E R S

P.O. Box 27 • 100 Karavan Drive • Fox Lake, Wisconsin 53933
(920) 928-6200 • FAX (920) 928-6201