

-INSTALL RH & LH TONGUE BRACKETS WITH HARDWARE AS SHOWN. USE THE 22 1/2" DIMENSION AS A REFERENCE.

-WITH TRAILER IN TOWING POSITION THE DIMENSION FROM THE CENTER OF MOUNTING ON THE TONGUE BRACKET AND THE CENTER OF THE MOUNTING HOLE ON THE TRAILER FRAME SHOULD MEASURE 15 1/4". IT IS IMPORTANT TO HOLD THIS DIMENSION AS IT WILL ALLOW THE GAS SPRING TO FUNCTION PROPERLY. **FAILURE TO DO SO WILL VOID WARRANTY.**

-TILT TRAILER AND INSTALL GAS SPRING WITH HARDWARE AS SHOWN. DO NOT OVER TIGHTEN.

# TRITON Customer Instruction Sheet


KIT NO.:  
08267

DESCRIPTION

XTD UNDER GAS LIFT KIT

DRAWN BY:  
Terri Feutz  
DATE:  
9-28-04

DRAWING NO.:  
**08269**

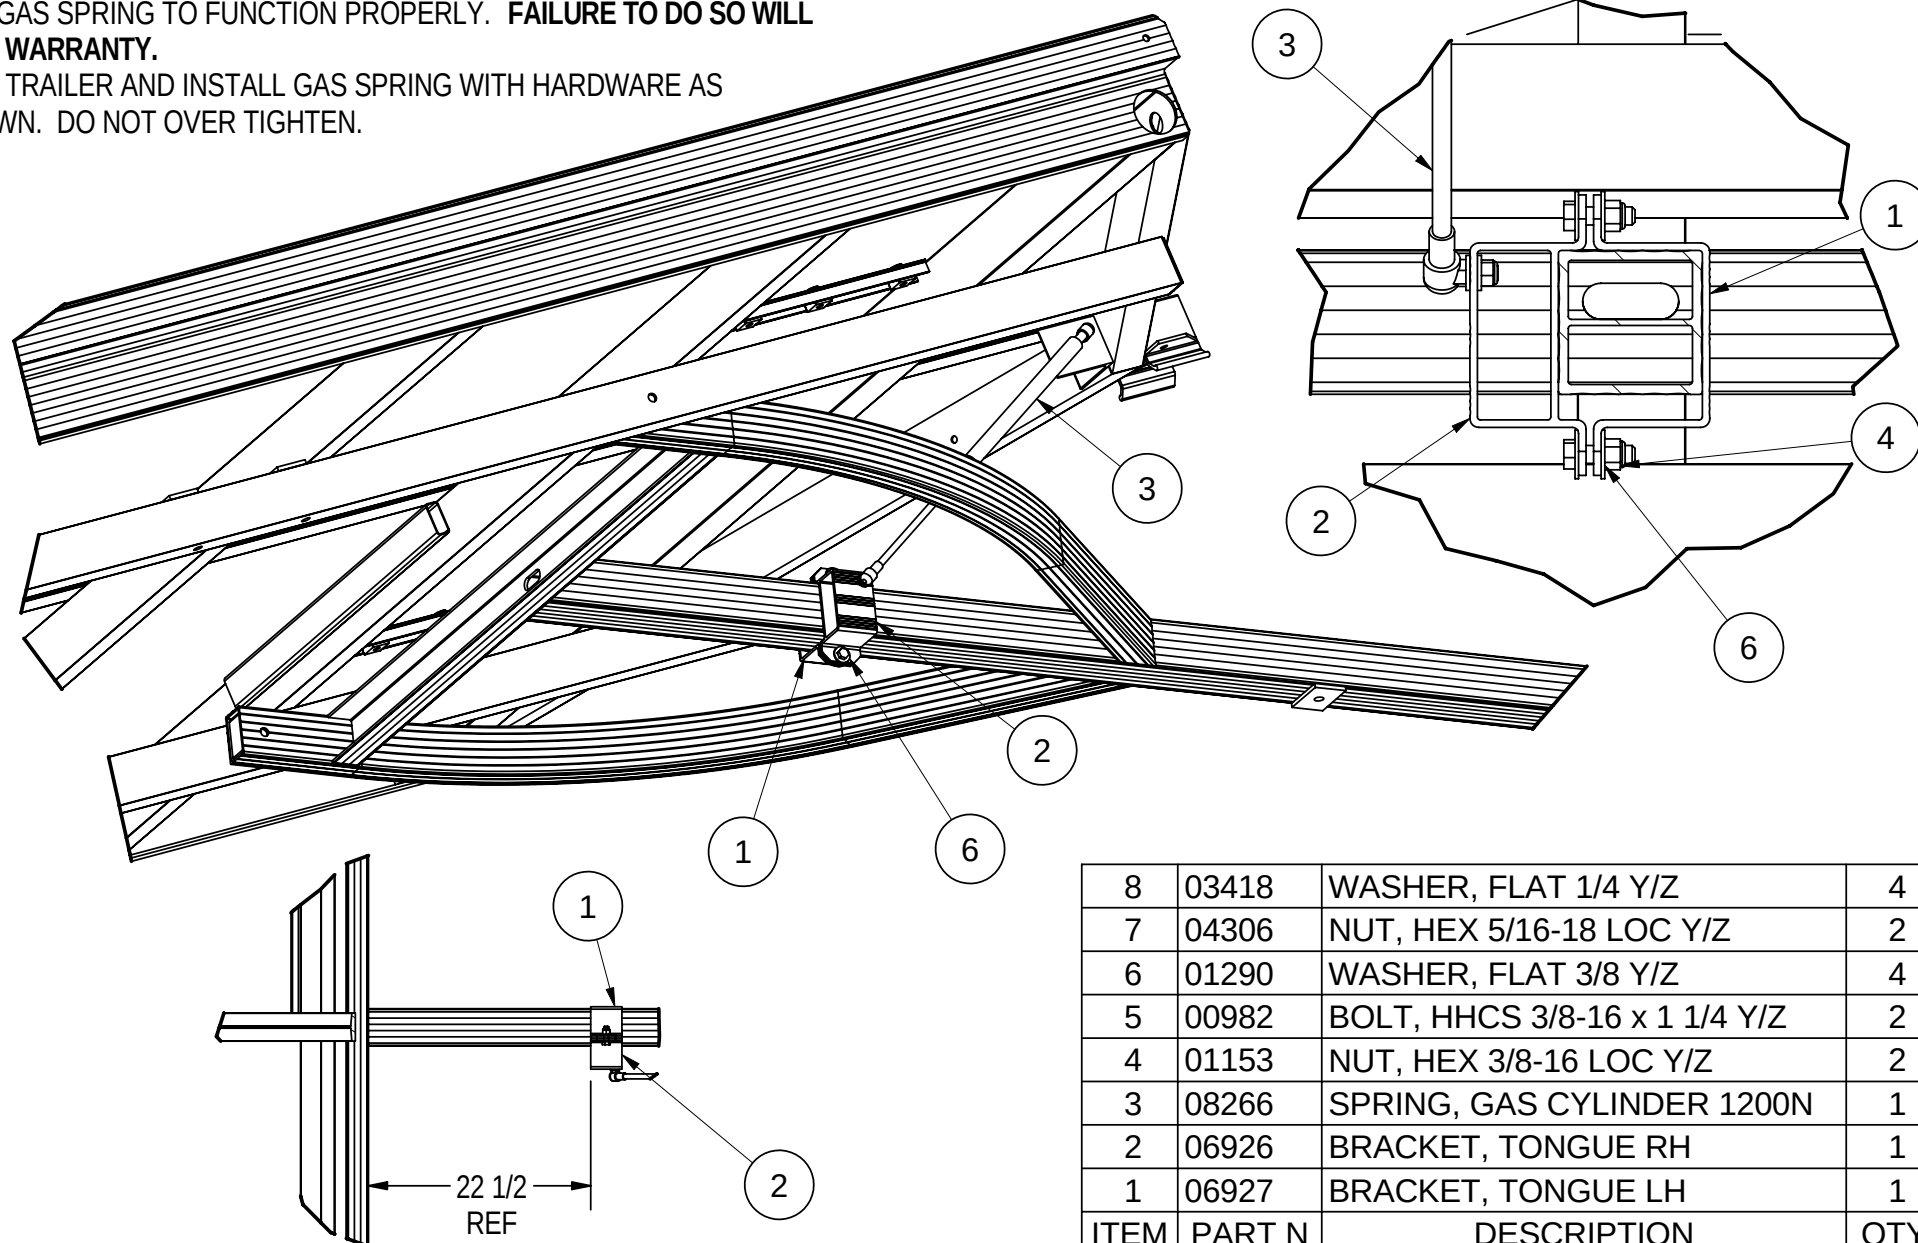

| 8    | 03418  | WASHER, FLAT 1/4 Y/Z          | 4   |
|------|--------|-------------------------------|-----|
| 7    | 04306  | NUT, HEX 5/16-18 LOC Y/Z      | 2   |
| 6    | 01290  | WASHER, FLAT 3/8 Y/Z          | 4   |
| 5    | 00982  | BOLT, HHCS 3/8-16 x 1 1/4 Y/Z | 2   |
| 4    | 01153  | NUT, HEX 3/8-16 LOC Y/Z       | 2   |
| 3    | 08266  | SPRING, GAS CYLINDER 1200N    | 1   |
| 2    | 06926  | BRACKET, TONGUE RH            | 1   |
| 1    | 06927  | BRACKET, TONGUE LH            | 1   |
| ITEM | PART N | DESCRIPTION                   | QTY |

Parts List